


安装外形图 Overall dimension



型号 Model	L
56WUA300a-I	413
56WUA400a-I	413
56WUA500a-I	433
56WUA300a-II	413
56WUA400a-II	413
56WUA500a-II	433



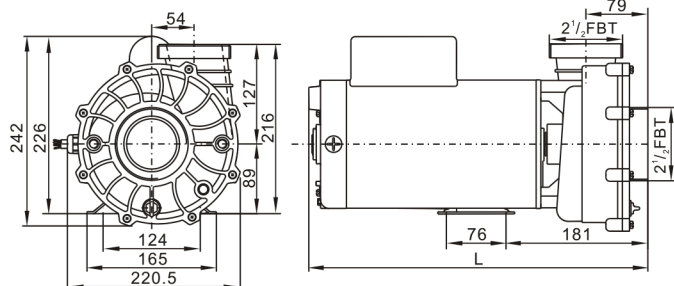


浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

性能曲线 Performance curves

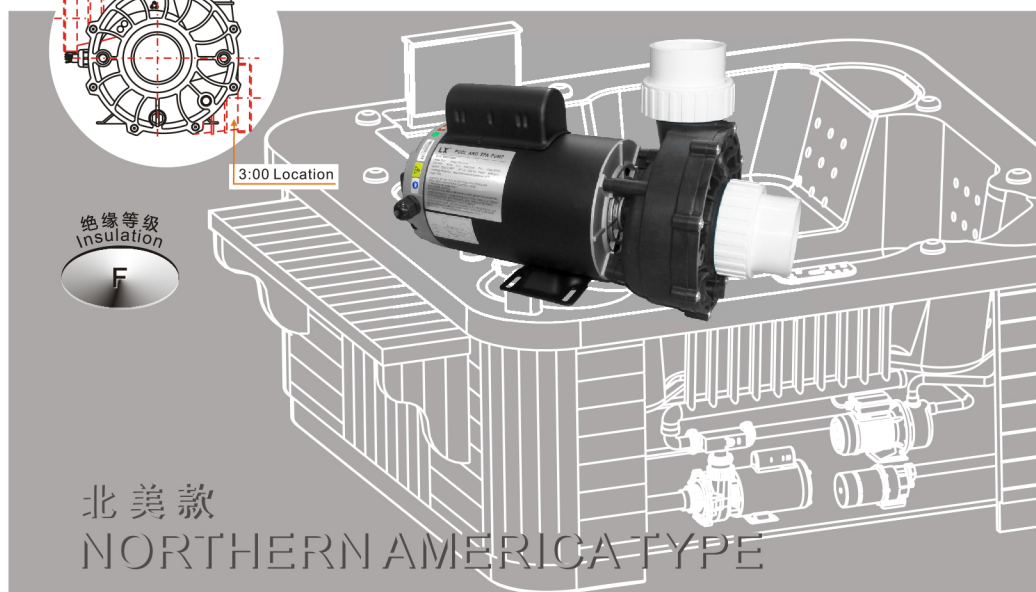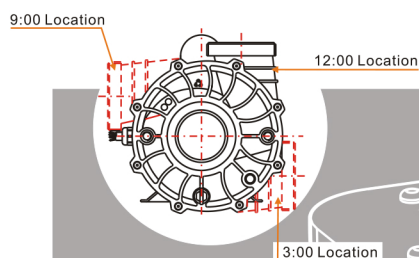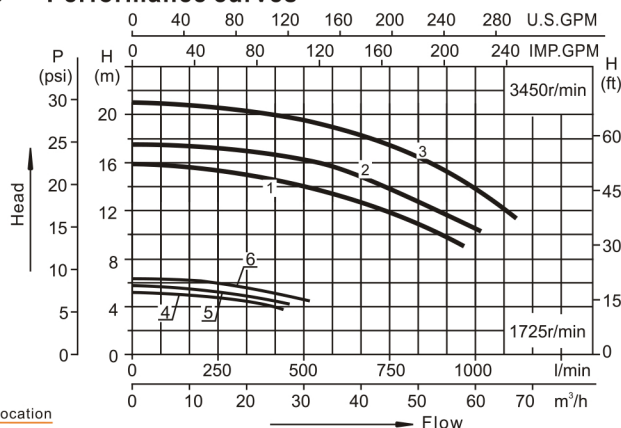

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	功率 Power(P ₁)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
					kW	HP				
56WUA300a-I	960	16	1	220/60	2.2	3.0	10	73or75	18	455×275×305
56WUA400a-I	1010	17.5	2	220/60	3.0	4.0	12	73or75	19.2	455×275×305
56WUA500a-I	1120	21	3	220/60	3.75	5.0	15	73or75	22	475×275×305
56WUA300a-II	440	5.0	4	220/60	0.55	0.75 (Low speed)	3.5	73or75	18.5	455×275×305
	960	16	1		2.2	3.0 (High speed)	10			
56WUA400a-II	460	5.5	5	220/60	0.55	0.75 (Low speed)	3.5	73or75	19.7	455×275×305
	1010	17.5	2		3.0	4.0 (High speed)	12			
56WUA500a-II	520	6.0	6	220/60	0.75	1.0 (Low speed)	5.0	73or75	23.5	475×275×305
	1120	21	3		3.75	5.0 (High speed)	15			

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

序号 NO.	名称 Name
1	接头螺母 Tie-in nut
2	接头 Tie-in
3	O形圈 O-ring
4	放水螺塞 Drainage plug
5	O形圈 O-ring
6	十字槽盘头螺钉和平垫圈组合件 Cross recessed pan head screw and washer assemblies
7	泵盖 Pump Cover

序号 NO.	名称 Name
8	O形圈 O-ring
9	活动口环 Activities Rings
10	叶轮 Impeller
11	机械密封 Mechanical Seal
12	泵壳 Pump Casing
13	电机 Motor

